



REPUBLIC OF THE PHILIPPINES
DEPARTMENT OF BUDGET AND MANAGEMENT
REGION VI

October 17, 2022

REQUEST FOR QUOTATION
No. 2022-10-038

The Department of Budget and Management Regional Office VI, through its Bids and Awards Committee, intends to undertake **NP-Small Value Procurement** for the procurement project: **Labor and Materials for the Fabrication and Painting of Water Tank Base Tower at DBM ROVI Main Building, and Minor Repair of DBM RO VI Buildings and Facilities**, in accordance with **Section 53.9** of the Revised Implementing Rules and Regulations of Republic Act No. 9184.

Name of Project	Fabrication and Painting of Water Tank Base Tower at DBM ROVI Main building and Minor Repair of DBM RO VI Buildings and Facilities	
Approved Budget for the Contract (Php)		
Line Item No.	Product Name	Budget
1	Labor and Materials for the Fabrication and Painting of Water Tank Base Tower at DBM ROVI Main building	118,469.40
2	Labor and Materials for the Minor Repair of DBM RO VI Buildings and Facilities	100,998.48
Area of Delivery	Department of Budget and Management Regional Office VI - 251-A General Hughes, St., Iloilo City	

Submission of closed/sealed quotation using the attached **Price Quotation Form** shall not be later than **3:00 p.m. of October 21, 2022**, at Division C, 1st Floor, DBM RO VI Old Building, 251-A General Hughes St., Iloilo City. Due to the non-availability of an online bidding facility, online or electronic submission and receipt of quotation is not allowed.

The following documents shall be submitted together with the quotation:

- a. Valid and current Mayor's Permit/Business Permit;
- b. PhilGEPS Registration Number (Preferably indicated on the space provided in the attached Annex "A");
- c. Latest Income/Business Tax Return; and
- d. Notarized Omnibus Sworn Statement.

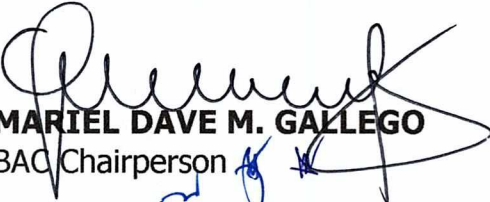
Any interlineations, erasures or overwriting in the closed/sealed quotation shall be valid only if they are signed or initialed by the bidder or his/her duly authorized representative/s.

Interested parties shall be allowed to conduct an inspection of the areas and fixture subject of the procurement project, during working days, from 9:00 AM to 4:00 PM. However, to ensure the observance of proper health protocols, such inspection shall be made only after securing clearance from the Finance and Administrative Division of this Office, through the BAC Secretariat.

The BAC Secretariat and their respective contact information are as follows:

1. Ms. Maritess G. Lumajen – telephone no. (033) 336-1389;
2. Mr. Stanley G. Superticioso – telephone no. (033) 337-2589; and
3. Mr. John Arnold C. Toribio – telephone no. (033) 335-0354.

Truly yours,


MARIEL DAVE M. GALLEGO
BAC Chairperson

PRICE QUOTATION FORM

Date _____

Department of Budget and Management
 Regional Office VI
 251-A General Hughes St., Iloilo City

Sir/Madam:

After having carefully read and accepted the terms and conditions in the Request for Quotation, hereunder is our quotation/s for the item/s as follows:

Line Item	Description	Unit	Qty	Unit Cost	Total Cost
1	<p>Materials and labor for the Fabrication and Painting of Water Tank Base Tower at DBM ROVI Main building.</p> <p><u>Contract Duration: 15 Calendar Days</u></p> <p><i>(Please refer to attached Annex A for details)</i></p> <p>Supply and delivery of materials and labor for the Fabrication and Painting of Water Tank Base Tower at DBM ROVI Main building.</p> <p>Specification(s):</p> <ul style="list-style-type: none"> a. <i>Materials (attached Specification for details)</i> b. <i>Labor (attached Specification for details)</i> c. <i>Demolition of Existing Structure and Re-installation of Water Tank</i> d. <i>Equipment</i> 	lot	1		
2	<p>Labor and Materials for the Minor Repair of DBM RO VI Buildings and Facilities.</p> <p><u>Contract Duration: 20 Calendar Days</u></p> <p><i>(Please refer to attached Annex B for details)</i></p> <p>I. Repair/Repainting of Water Tank Base Tower at DBM RO VI Annex building</p> <p>Specification(s):</p> <ul style="list-style-type: none"> a. <i>Materials (attached Specification for details)</i> b. <i>Labor (attached Specification for details)</i> c. <i>Removal and re-installation of Existing Fiber Glass Water Tank</i> d. <i>Equipment</i> 	lot	1		

	<p>II. Plumbing Work (Main & Annex Building)</p> <p>Specification(s):</p> <ul style="list-style-type: none"> a. <i>Materials (attached Specification for details)</i> b. <i>Labor (attached Specification for details)</i> c. <i>Equipment</i> <p>III. Demolition of Partition including Repair/Repainting of Wall & Ceiling at FAD Working Area</p> <p>Specification(s):</p> <ul style="list-style-type: none"> a. <i>Materials (attached Specification for details)</i> b. <i>Labor (attached Specification for details)</i> c. <i>Demolition of existing structure</i> <p>IV. Repair/ Modification of Concrete Gutter and Water Tank Portion of Main Building</p> <p>Specification(s):</p> <ul style="list-style-type: none"> a. <i>Materials (attached Specification for details)</i> b. <i>Labor (attached Specification for details)</i> c. <i>Removal and Re-installation of Existing Roof</i> d. <i>Equipment</i> <p>V. Tile Works (Div. C & Women's Dormitory)</p> <p>Specification(s):</p> <ul style="list-style-type: none"> a. <i>Materials (attached Specification for details)</i> b. <i>Labor (attached Specification for details)</i> c. <i>Removal and Cleaning of Existing Floor Tiles</i> d. <i>Equipment</i> 				
					TOTAL

[Handwritten signature]

[Handwritten mark]

(Total Amount in Words)

The above-quoted prices are inclusive of all costs and applicable taxes.

Truly yours,

Name and Signature of Representative

Name of Company and Tel. No.

PhilGEPS Registration No: _____

Annex A

**PROJECT : FABRICATION AND PAINTING OF WATER TANK
MAIN BUILDING**

LOCATION : 251-A General Hughes Street, Iloilo City

Duration of the Contract: 15 DAYS

PROGRAM OF WORKS

I -	FABRICATION AND PAINTING OF WATER TANK BASE TOWER OF DBM RO VI MAIN BLDG.				
	A. Materials				
4 lgths.	G.I. Pipe 3"x 6m, schedule 40				
2 lgths.	G.I. Pipe 2"x 6m, schedule 40				
5 lgths.	G.I. Pipe 1 1/2"x 6m, schedule 40				
14 lgths.	G.I. Pipe 1"x 6m, schedule 40				
1 shts.	Stainless Checkered Plates 1/8"x4'x 8'				
1 kgs	Stainless Welding Rod #3/32				
10 kgs	Welding Rod #3/32				
5 bxs.	Cutting Disc 4", super thin				
3 pcs	Cutting Wheel 14"				
5 pcs	Sanding Stone 4"				
4 gals.	Epoxy Primer Gray				
1 gals.	Epoxy Reducer				
6 pcs	Baby roller w/handle				
6 pcs	Baby roller filler				
2 pcs	1 1/2" paint brush				
2 pcs	1" paint brush				
5 pcs	Sanding Paper #100				
10 pcs	Sand Paper #120				
6 cans	Screened Gravel				
4 cans	Sand				
2 bag	Portland Cement				
1 pc.	Corr. Steel Bar 12mm x 6m				
1 lot	Scuffoldings				

5

		B. Labor			
		Foreman			
		Welder			
		Skilled Laborer			
		C. Demolition of Existing Structure and Re- installation of Water Tank			
		D. Equipment			
		Welding Machine			
		Cut-Off Machine			
		Grinder			

8

PROJECT: MINOR REPAIR OF DBM RO VI BUILDING AND FACILITIES

LOCATION : 251-A General Hughes Street, Iloilo City

Duration of the Contract: 20 DAYS

PROGRAM OF WORKS

I -		REPAIR/REPAINTING OF WATER TANK BASE TOWER @ DBM RO VI ANNEX BLDG.			
		A. Materials			
	1	shts. Stainless Checkered Plates 1/8"x4'x 8'			
	1	kg. Stainless Welding Rod #3/32			
	1	kg. Welding Rod #3/32			
	1	bxes. Cutting Disc 4", super thin			
	2	pcs Sanding Stone 4"			
	1	gals. Epoxy Primer Gray			
	1	qt. Epoxy Reducer			
	2	pcs Baby roller w/handle			
	2	pcs Baby roller filler			
	1	pcs 1 1/2" paint brush			
	1	pcs 1" paint brush			
	5	pcs Sanding Paper #100			
	5	pcs Sand Paper #120			
		B. Labor			
		Foreman			
		Welder			
		Skilled Laborer			
		C. Removal and Re-installation of Existing Fiber Glass Water Tank			
		D. Equipment			
		Welding Machine			
		Grinder			
		Electric Drill			

II -		PLUMBING WORKS (Main & Annex Bldg.)			
		A. Materials			
	3	pc PVC Blue Pipe 1"x 10'			

15	pcs	PVC Blue Pipe 3/4"x 10'			
5	pcs	PVC Blue Pipe 1/2"x 10'			
5	pcs	PVC Elbow 1"			
20	pcs	PVC Elbow 3/4"			
20	pcs	PVC Elbow 1/2"			
5	pcs	PVC Threaded Elbow 1"			
5	pcs	PVC Threaded Elbow 3/4"			
5	pcs	PVC Threaded Elbow 1/2"			
2	pcs	PVC Tee 1"			
6	pcs	PVC Tee 3/4"			
8	pcs	PVC Tee 1/2"			
5	pcs	PVC Threaded Tee 1"			
5	pcs	PVC Threaded Tee 3/4"			
5	pcs	PVC Threaded Tee 1/2"			
5	pcs	PVC Plug 1"			
5	pcs	PVC Plug 3/4"			
5	pcs	PVC Plug 1/2"			
2	pcs	PVC MTA 3/4"			
2	pcs	PVC MTA 1/2"			
10	pcs	PVC Reducer 1/2"x 3/4"			
8	pcs	PVC Reducer 1"x 3/4"			
4	pcs	Shower Valve Faucet			
4	pcs	PVC Ball Valve 1"			
4	pcs	PVC Ball Valve 3/4"			
4	pcs	PVC Ball Valve 1/2"			
4	cans	PVC Solvent Cement 400cc			
25	pcs	PVC Clamp 1"			
100	pcs	PVC Clamp 3/4"			
50	pcs	PVC Clamp 1/2"			
		B. Labor			
		Foreman			
		Plumber			
		Skilled Laborer			
		C. Equipment			
		Electric Drill			

III -		DEMOLITION OF PARTITION INCLUDING REPAIR/REPAINTING OF WALL & CEILING AT FAD WORKING AREA			

8

		A. Materials			
1	gal	Flat Wall Enamel, White			
2	gals	Semi-Gloss Latex, Beige			
2	qts	Lacquer Thinner			
2	pcs	Baby Roller w/handle			
2	pcs	Baby Roller, refill			
2	pcs	1 1/2" Paint Brush			
1	pcs	1" Paint Brush			
2	pcs	Sanding Paper #100			
6	pcs	Sand Paper #120			
50	mtrs	Stranded Wire #2.0mm			
25	mtrs	Stranded Wire #3.5mm			
1	rl	Electrical Tape, big			
		B. Labor			
		Foreman/Carpenter			
		Carpenter			
		Electrician			
		Painter			
		Skilled Laborer			
		C. Demolition of existing structure			

IV -	Repair/Modification of Concrete Gutter and Water Tank Portion of Main Building				
		A. Materials			
2	pcs	PVC Gutter 22"x 8'			
1	pc	PVC Gutter Connector 22"			
1	pc	PVC Gutter Right-End Cap 22"			
1	pc	PVC Gutter Left-End Cap 22"			
2	pcs	Sanitary Pipe 3"x 10", S1000			
2	pcs	Sanitary Wye 3"			
2	pcs	Sanitary Elbow 3"x 45			
1	can	PVC Solvent Cement 400cc			
1	pc	Tekscrew Adaptor			
100	pcs	Tekscrew 1 1/2"			
100	pcs	Blind Rivets 1/8"x 3/4"			
1	tube	Selicon Sealant Clear			
1	lot	Scaffoldings			
		B. Labor			
		Foreman/Installer			

8

		Installer			
		Skilled Laborer			
		C. Removal and Re-installation of Existing Color Roofing			
		D. Equipment			
		Impact Drill			

V -	Tile Works (Div. C & Womens Dormitory)				
		A. Materials			
	12 pcs.	Granite Tiles 60 x 60cm			
	2 gals.	Concrete Epoxy (LV)			
	1 pc.	Diamond Tile Cutter 4"			
		B. Labor			
		Foreman/Tile Setter			
		Tile Setter			
		Skilled Laborer			
		C. Removal and Cleaning of Existing Floor Tiles			
		D. Equipment			
		Grinder			

8